
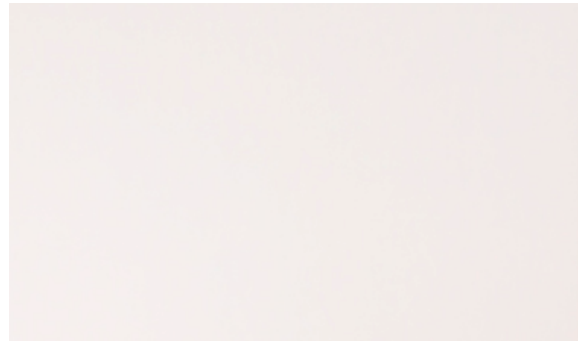


Indonesian High Pressure Laminate Specifications

Veneer Cut	R/C, WPF
Size	48"x 96" , 48.5"x96.5"
Thickness	19MM,18MM,15MM,12MM,9MM,5.2MM
Core	Falcata+Jabon
Calibration	-.5/+ .2
Moisture	<12%
Origin	Indonesia
Certification	CARB Phase 2 , TSCA TITLE VI
Finish	Mat Black, White, 1 S, 2 S
Glue Type	Interior, TSCA TITLE VI, CARB
HPL Thickness	0.5mm

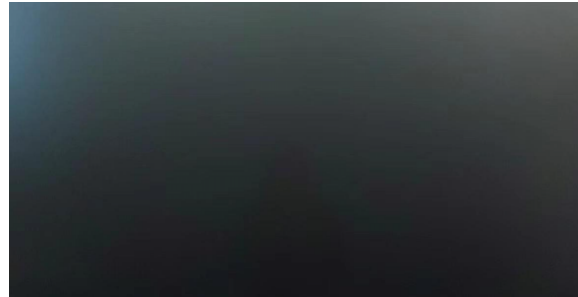

Thickness	No of Plies	Sheet/Crate	Weight/Sheet
5.2	3	180	14 Lbs
9	5	100	26 Lbs
12	7	75	34 Lbs
18	9	50	52 Lbs
19	9	50	54 Lbs

Indonesian HPL Features

- ❖ Lighter core.
- ❖ High Bonding strength -No Delamination.
- ❖ 100 %Calibrated
- ❖ Thickness tolerance as per international plywood standards (IWPA,HPVA).
- ❖ Maintains Perfect structure , No warping issues.
- ❖ No Core gaps -100% composed cores
- ❖ 100% Machine dried core used
- ❖ Smooth and Clean Surface
- ❖ Perfect -.5/+ .2 Calibration

Applications: Cabinet Box,Furnitures, Cases , Shelving